DS-KIS205 Video Door Phone

Key Features


Door Station

- Self-adaptive IR supplement
- One-touch calling
- Pinhole camera with 720 x 576 @ 25 fps
- Unlock controlling
- IP65

Indoor Station

- Hands-free video intercom communication
- Supports monitoring the door station and the external analog camera
- Supports image capture (Max. 200) and overwrite when exceed 200, Supports Picture Storage
- Supports captured image playback
- Remote unlocking

Typical Application

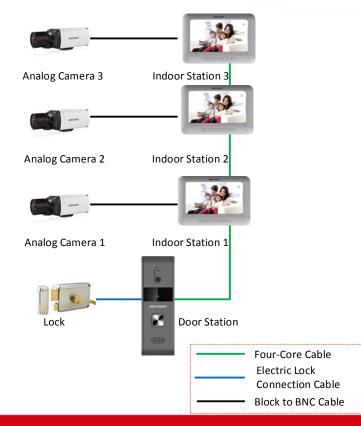












Specifications

Video Door Phone Model	DS-KIS205			
Door Station (DS-KB2421-IM)				
Video Parameters				
Camera	1/4" CMOS			
Resolution	720 × 576			
Video frame rate	PAL: 25 fps			
Audio parameters				
Audio input	Built-in Omnidirectional Microphone			
Audio output	Built-in Loudspeaker			
Audio quality	Noise Suppression			
Light Supplement				
Light supplement mode	Photosensitive IR Supplement, IR Range: 2 Meters			
Device interfaces				
Formulae interafores	1 Four-Wire Interface (1-ch Video Input, 1-ch Audio Input/Output, 1-ch Power			
Four-wire interface	Supply, 1-ch Grounding)			
IO output	1 Relay Output			
General				
Material	Zinc Alloy			
Power consumption	Max. 5W			
Working temperature	-30° C to +70° C (-22° F to 158° F)			
Protection	IP 65			
Working humidity	10% to 90%			
Dimension (L x W x H)	145mm × 49.2 mm × 26.45 mm (5.7" × 1.9" × 1.0")			
	Indoor Station (DS-KH2220-S)			
Display parameters				
Display screen	7-Inch Colorful TFT LCD			
Display resolution	800 × 480			
Operation method	Physical Button			
Audio parameters				
Audio input	Built-in Omnidirectional Microphone			
Audio output	Built-in Loudspeaker			
Audio quality	Noise Suppression and Echo Cancellation			
Device interfaces				
	4 Four-Wire Interfaces			
Four-wire interface	1-ch Video Input, 1-ch Audio Input/Output, 1-ch Power Supply, 1-ch Grounding			
General				
Power supply	12 VDC			
Power consumption	<5 W			
Working temperature	-10° C to + 55° C (14° F to 131° F)			
Working humidity	10% to 90%			
Dimension (L x W x H)	195.8 mm × 132.8 mm × 18.39 mm (7.7" × 5.2" ×0.7")			



Appearance and Interfaces

Door Station



Indoor Station

Index

1

2

3


4

5

6

7

8



Description

LCD Display Screen

Unlock Key

Image Key

Live View Key

Volume Wheel

Microphone

Power Supply Indicator

Call Accept/Decline Key

	Index	Description
	1	Microphone
Die	2	Built-in Camera
	- 3	Supplement Light
2	4	Photoresistor
	5	Call Button
	6	Loudspeaker



Headquarters

No.555 Qianmo Road, Binjiang District, Hangzhou 310051, China T +86-571-8807-5998 overseasbusiness@hikvision.com

Hikvision USA T+1-909-895-0400 sales.usa@hikvision.com

Hikvision Australia T+61-2-8599-4233 salesau@hikvision.com

Hikvision India T +91-22-28469900 sales@pramahikvision.com

Hikvision Canada T +1-866-200-6690 sales.canada@hikvision.com

Hikvision Thailand T+662-275-9949 sales.thailand@hikvision.com Hikvision Europe T +31-23-5542770 sales.eu@hikvision.com

Hikvision Italy T +39-0438-6902 info.it@hikvision.com

Hikvision Brazil T +55 11 3318-0050 Latam.support@hikvision.com

Hikvision Turkey T +90 (216)521 7070- 7074 sales.tr@hikvision.com

sales.my@hikvision.com

Hikvision Malaysia

T+601-7652-2413

Hikvision Vietnam T +84-974270888

Hikvision UK & Ireland T+01628-902140 sales.uk@hikvision.com

Hikvision South Africa Tel: +27 (10) 0351172 sale.africa@hikvision.com

Hikvision France T +33(0)1-85-330-450 info.fr@hikvision.com

Hikvision Kazakhstan T +7-727-9730667 nikia.panfilov@hikvision.ru

sales.vt@hikvision.com

Hikvision UAE T +971-4-4432090 salesme@hikvision.com

T +65-6684-4718 sg@hikvision.com

Hikvision Spain T +34-91-737-16-55

Hikvision Tashkent T +99-87-1238-9438

info.hk@hikvision.com

T +7-495-669-67-99

Hikvision Korea T +82-(0)31-731-8817 sales.korea@hikvision.com

Hikvision Indonesia T +62-21-2933759

Hikvision Colombia

© Hikvision Digital Technology Co., Ltd. 2018 | Data subject to change without notice | 0110001080504

Hikvision Singapore

info.es@hikvision.com

uzb@hikvision.ru Hikvision Hong Kong T +852-2151-1761 Hikvision Russia saleru@hikvision.com

Hikvision Poland T +48-22-460-01-50 info.pl@hikvision.com

Sales.Indonesia@hikvision.com

sales.colombia@hikvision.com